


Auteursrecht volgens de wet voorbehouden.

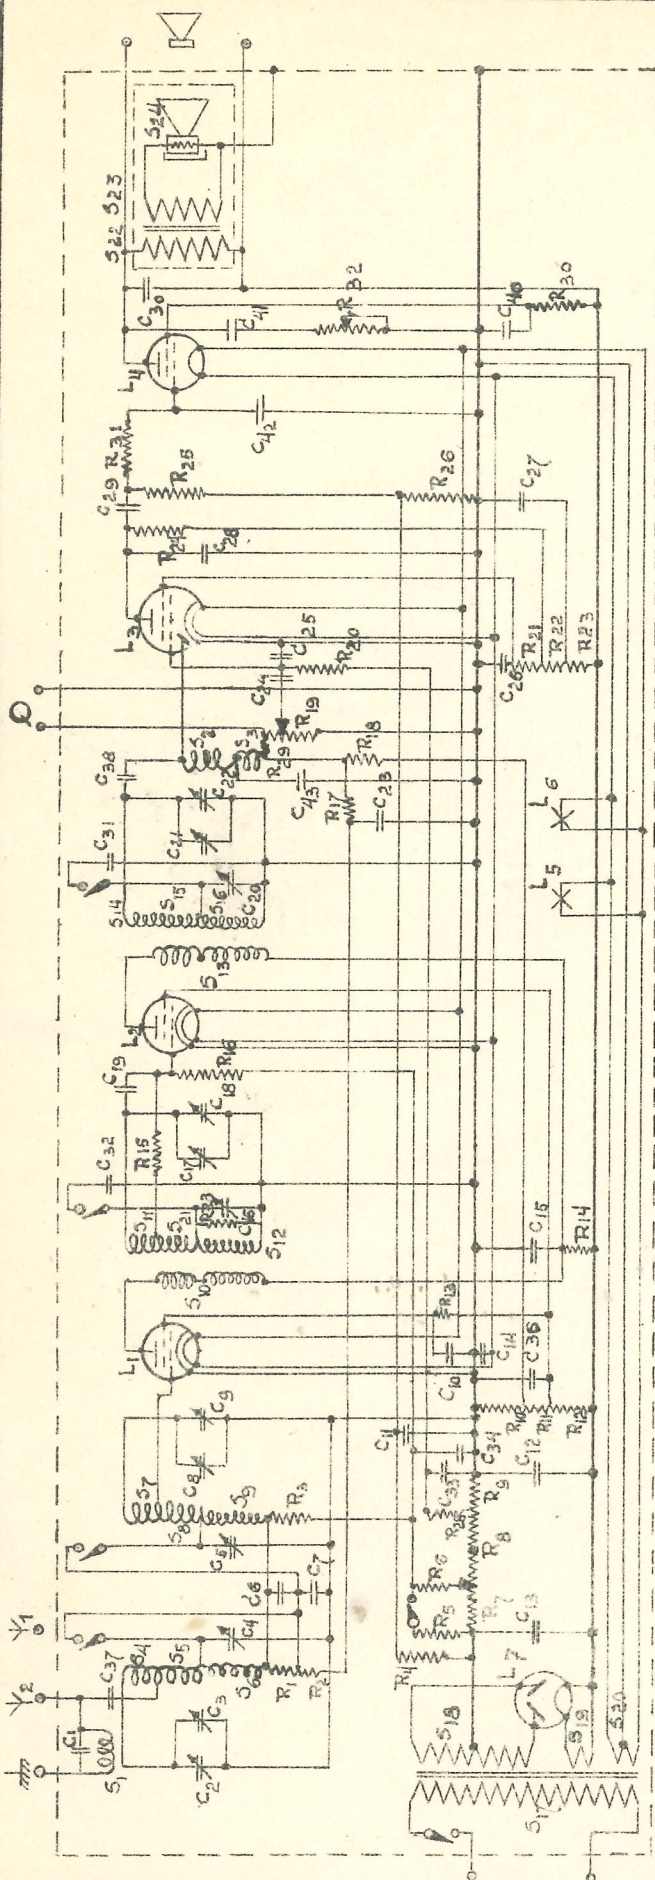

OMSCHRIJVING:

PRINCIPE SCHEMA
4-TUBES ONTVANGER KY.130

| Spoe Jen. | Code Nr. | Condensatoren. | Code Nr. | Condensatoren. | Code Nr. | Weerstanden. | Code Nr. | Lampen. |
|--------------------|----------|-----------------|----------|----------------|----------|--------------|----------|----------------|
| S1 = 700 | 2572799 | C1 = 100 μF | 25112630 | C29 = 2000 μF | 25113110 | R1 = 0,2 | 25722720 | L1 = E 462 |
| S2 = 1600 | 2596067 | C2 = 420 | CK820020 | C30 = 2000 | " | R2 = 10000 | 690 | L2 = E 462 |
| S3 = ca. 46 | | C3 = 27 | 25115410 | C31 = 40000 | 25113970 | R3 = 4 | 680 | L3 = E 444 |
| S4 = 70 | 25660570 | C4 = 27 | " | C32 = 40000 | " | R4 = 32 | 380 | |
| S5 = ca. 193 | | C5 = 27 | 25115635 | C33 = 0,25 μF | " | R5 = 32 | 300 | |
| S6 = ca. 46 | | C6 = 20000 | 25115970 | C34 = 0,25 | 10204. | R6 = 2,5 | CK808040 | |
| S7 = 70 | 25960580 | C7 = 27 | 25115410 | C35 = 0,5 | CK210070 | R7 = 550 | 25722500 | R29 = 50000 |
| S8 = ca. 193 | | C8 = 420 | CK820020 | C36 = 25 | CK210060 | R8 = 200 | 510 | R30 = 4000 |
| S9 = ca. 48 | | C9 = 0,1 | 2511533 | C37 = 25 | " | R9 = 64. | 500 | R31 = 0,2 m.Ω |
| S10 = ca. 48 | | C10 = 0,1 | 25116040 | C38 = 15 | " | R10 = 3200. | 25722210 | R20 = 200 |
| S11 = ca. 72 | | C11 = 16 | " | C40 = 1 | 25113970 | R11 = 20000 | 200 | R32 = 0,1 m.Ω |
| S12 = ca. 196 | | C12 = 16 | 25115330 | C41 = 40000 μF | 25112630 | R12 = 20000 | 25722230 | R33 = 0,32 m.Ω |
| S13 = ca. 48 | | C13 = 0,1 | " | C42 = 100 | " | R13 = 1000 | " | |
| S14 = ca. 48 | | C14 = 0,1 | 25115410 | C43 = 100 | " | R14 = 1000 | 550 | |
| S15 = ca. 72 | | C15 = 27 | " | " | " | R15 = 4,6 | 550 | |
| S16 = ca. 196 | | C16 = 27 | CK820020 | " | " | R16 = 3,2 | 290 | |
| S17 = univ. spoel. | | C17 = 420 | 210040 | " | " | R17 = 5 | 740 | |
| S18 = 2x1600 | | C18 = 27 | 25115410 | " | " | R18 = 2 | 660 | |
| S19 = 28 | 2504797 | C19 = 27 | " | " | " | R19 = 0,5 | CK808020 | |
| S20 = 28 | | C20 = 27 | 25115410 | " | " | R20 = 1 | 25722730 | |
| S21 = 4000 | | C21 = 27 | " | " | " | R21 = 0,4 | 640 | |
| S22 = 4000 | | C22 = 420 | 25115330 | " | " | R22 = 64000 | 190 | |
| S23 = 57 | 2504799 | C23 = 0,1 | 25113970 | " | " | R23 = 25000 | 590 | |
| S24 = 47 | 50002159 | C24 = 10.000 μF | 25112630 | " | " | R24 = 0,1 | 710 | |
| | | C25 = 200 | 25112630 | " | " | R25 = 1 | 730 | |
| | | C26 = 0,5 | " | " | " | R26 = 2,5 | 500. | |
| | | C27 = 1 | 25112870 | " | " | R28 = 0,8 | 460 | |
| | | C28 = 320 | " | " | " | | | |

| | | | |
|-----|---------------|------|----------|
| ∇ | = VOORBWERKT | 25 | = ± 0,5 |
| ∇∇ | = NABEWERKT | 25,0 | = ± 0,2 |
| ∇∇∇ | = GLADBEWERKT | 25,0 | = ± 0,05 |

A 4



N.V. Radiofabriek en Ingenieursbureau v/h
VAN DER HEEM en BLOEMSMA

Schaal: Gal.: A

Dat.: 4/7 '33.

TEEKENING No
8 000130